

Miele
PROFESSIONAL

Miele's new Little Giants for Small scale laundry operations

Washer extractor PW 5065, PW 6065
and PW 6065 PLUS

Tumble dryer PT 5135 C and PT 5136

Rotary ironer HM 16-83



The Miele laundry system: The compact solution

The compact solution for hotels and healthcare:
practically orientated, economical laundry care for the in-house
laundry – fast throughput, optimum results and low costs.



Washing

MIELE'S LITTLE GIANTS, PW 5065, PW 6065 and PW 6065 PLUS, are the ideal entry level machines for small, in-house laundries. Featuring a wide range of standard programmes they also offer a good selection of additional functions and programmes to suit a wide range of applications.

These machines also benefit from Miele's unique patented Honeycomb drum with a sculptured surface. A thin film of water cushions the garments in the drum which reduces fibre breakage and pilling. After spinning laundry is easier to unload and because there is less stress caused to the load during washing you have the reassurance that your laundry will keep its shape and last longer.

Tested and approved by the Water Regulation Advisory Scheme, these machines can be connected to mains water in any application, including category 5 high risk establishments e.g. nursing homes, in accordance with Water Supply (Water Fittings) Regulations 1999.



Drying

The perfect complement to Miele's PW 5065 and PW 6065 washer-extractors are the 6.5 kg capacity tumble dryers PT 5135 C and PT 5136 with a range of highly developed drying programmes to ensure your laundry gets the best treatment possible.

The reverse action drum ensures energy efficient drying with tangle-free results, and the electronic sensing system means an automatic process which eliminates operator guesswork.



Ironing

Miele's compact HM 16-83 rotary ironer provides the perfect finishing touch for your in-house laundry. This ironer can cope with up to 15 kg of flatwork per hour and because it takes up very little space, can be sited against a wall where it is easy for one operator to use.

Miele – Adding value!



Miele can look back on decades of experience in developing washer-extractors and cleaning processes. The concepts and features of Miele's professional up-to-the-minute washer-extractors, tumble dryers and high throughput rotary ironers are based on this experience. The advantage to the customer is that every establishment can be given comprehensive advice and a thorough analysis of its operating and economic requirements. Even the installation of the machines can be planned down to the smallest detail, including drawings where required.

**Better
know-how**



Miele offers technologically advanced products that are made in compliance with DIN EN ISO 9001. Solid construction, high quality materials, sophisticated technology and excellence of finish with electronic components that are designed and made in-house guarantee the legendary longevity of Miele machines. The reliability of all components and patented technologies are further examples of the optimising of Miele quality through technical innovation.

"Forever better" – or "Immer besser" has been the cornerstone of Miele's philosophy for over one hundred years. Miele was awarded the "Best practice" award 2002 for innovation, reliability and quality of product by the Institute for Productivity and Quality (IPQ).

**Better
quality**



From start to finish, Miele is the professional partner for your laundry – perfect laundry care for satisfied customers. Easy access to Miele ensures prompt attention for all enquiries, while Miele's network of sales and service centres guarantees fast assistance when help is needed. Special maintenance and service contracts ensure down-time is minimised and provides extra peace of mind.

**Better
service**

MIELE'S LITTLE GIANTS

Washer-extractors

The advantages of Miele's Professional technology



WRAS
APPROVED
PRODUCT

PW 6065 PLUS

Quality build

Miele machines are made with the highest quality materials and expert workmanship. All components, from the shock-absorbers on the drum cradle and the drum bearings to the outer casing and the very last nut and bolt in the machines, are quality tested to ensure many years of good service. Depending on model both the washer-extractors and tumble dryers are available with either a high-grade stainless steel housing, or a white high-quality vitreous direct enamel housing which is resistant to corrosion, yellowing and chipping.

Spaceframe construction

Many machines are awkward to service because opening them to access components is a lengthy process. With a MIELE LITTLE GIANT the front, sides and lid are easily removed by undoing a few screws, so all major working parts are easy for a service engineer to access.

Patented Honeycomb drum

Miele's unique patented Honeycomb drum is made from high grade stainless steel. With a sculptured surface, a thin film of water cushions the garments in the drum to reduce fibre breakage and pilling. The specially designed drum ribs together with optimised drum rhythms help drench the laundry quickly so programme durations are shorter, water consumption levels are kept down and your laundry gets the best possible care.

Large capacity drum with drum lighting

The new drums have a maximum load capacity of 6.5 kg dry weight and are ideal for the efficient processing of large quantities of laundry. With a 30 cm wide door aperture, access for loading and unloading has been improved, and because the drum has integrated lighting there is no danger of leaving something behind when unloading it.

Efficient professional motor

The powerful asynchronous motor with its frequency-controlled drive system enables a gentle run-up to spin and high spin speeds of up to 1400 rpm to be achieved. A patented two-stage imbalance sensing system guarantees optimum laundry distribution during spinning, ensures maximum spinning performance and is a contributing factor to the legendary longevity of Miele machines. With a G-factor of 526, water extraction is very efficient and laundry can be dried quickly and efficiently in the matching tumble dryer afterwards.

Individual solutions for individual requirements

Up to 4 liquid detergent dispensing pumps can be connected to the machine for simple, precise and economical dispensing. The machines can also be connected to a payment system and are equipped with a serial interface for connection to a pc or printer.

Controls and programmes

Miele NOVOTRONIC L controls offer a wide range of textile care programmes. Programme selection using single-knob controls and an LC display are especially user-convenient. The various settings and functions such as delay start, programme parameters (programme duration, spin speed), countdown indicator and time of day indicator, as well as special programmes, when selected, are displayed in the user's language. In addition to standard washing and care programmes, the PROFI-LINE series with a large selection of special and additional programmes meets the needs of both private and commercial laundry care. All wash programmes have matching counterparts on tumble dryers.

Miele USP: Occupation-specific additional programmes

Target group programmes: Hairdressers

Towels Short and Towels +:

Short wash and rinse cycles for slightly and heavily soiled towels respectively

Gowns:

Short wash and rinse cycle for slightly soiled gowns made from synthetic material; reduced creasing

Target group programmes: Butchers

Grease and Fat and Grease and Fat +:

Safe removal of medium and heavy fat and grease stains, blood and protein stains

Target group programmes: Bakers

Grease and fat:

Safe removal of grease and fat stains

Flour and Flour +:

Programmes with cold pre-washes for optimum removal of medium and heavy flour soiling

Short programme durations

Quick wash programmes enable fast processing times and efficient laundry turnaround. With this faster throughput more programmes can be run daily and you can maintain smaller stocks of laundry.

Healthcare applications


Dump valve drain versions of the PW 6065 feature two sluice and thermal disinfection programmes meeting Department of Health guidelines HSG (95) 18, and conform to the requirements of The Care Standard Act 2000.

Installation friendly

Where space is at a premium a Miele tumble dryer can be stacked on top of the washer-extractor using a special stacking kit. This option only requires 600 x 700 mm of floor space!

Economical

The innovative controls automatically determine the load size, required water consumption and water absorbency, once the programme has started, resulting in optimum water and energy use.

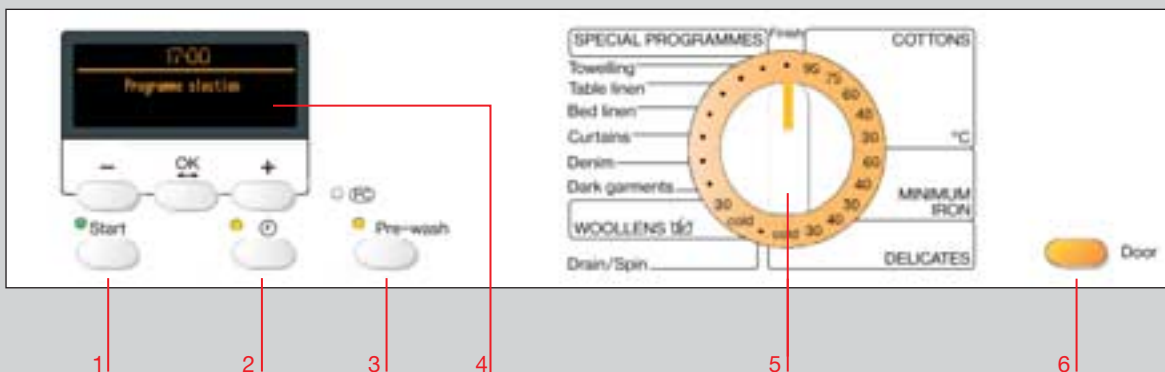

PW 5065

- 1 Start button
- 2 Delay start button
- 3 Pre-wash button
- 4 User-friendly LCD graphic display
- 5 Rotary selector switch
- 6 Door release button

MIELE'S LITTLE GIANTS

Tumble dryers



PT 5136

Patented Honeycomb drum

The hexagonal pattern in the drum on the tumble dryers is convex, creating air pockets to gently catch and cushion the laundry as it tumbles to the bottom of the drum. This allows warm air to surround the laundry enabling more efficient drying. And with less friction between fabric and the drum, laundry comes out smoother and less creased, so finishing is easier too.

Large area fluff filter

The large surface area of fluff filter on the vented dryer is capable of collecting the fluff from up to 16 drying cycles (depending on the type of fabric being dried).

Vented or Condenser?

MIELE'S LITTLE GIANT tumble dryers are available in both vented and condenser versions. The condenser tumble dryers also have a pump-away facility to drain the condensate through a waste pipe at the rear which can be connected to a sink, drain outlet, etc. So whatever the site conditions there's a dryer to suit!

Winning combination

MIELE'S LITTLE GIANT tumble dryers with their extremely short programme durations and large drum capacity enable large quantities of laundry to be processed quickly and efficiently. With short turnaround times you can reduce the amount of time spent processing laundry each day.

Spaceframe construction

Many machines are awkward to service because opening them to access components is a lengthy process. With a MIELE LITTLE GIANT the front, sides and lid are easily removed by undoing a few screws, so all major working parts are easy for a service engineer to access.

Installation friendly

Where space is at a premium the tumble dryer can be stacked on top of a Miele washer-extractor using a special stacking kit. (See illustration on page 5). This option only requires 600 x 700 mm of floor space!

NOVOTRONIC L controls


These new controls offer easy operation for simple, safe programme selection and gentle laundry care. Operation is via single-knob programme selection. Additional buttons for pre-wash and a 24-hour delay start feature round off the user-friendly features of the controls. Programme parameters (programme duration, spin speed), count-down indicator and time of day indicator, as well as special programmes, when selected, are shown in the display.

Individual programmes

In order to provide user convenience benefits and gentle laundry care, NOVOTRONIC L controls feature drying programmes with various drying levels, 2 time-controlled programmes, 8 special programmes and a 'Low temperature' function.

Timed drying or sensor drying

An electronic moisture sensor constantly monitors the residual moisture level of the load in the sensor drying programmes ensuring that laundry is gently tumbled to the exact degree of dryness required. Where timed drying is preferred there is the choice of a cool air or hot air timed drying programme.

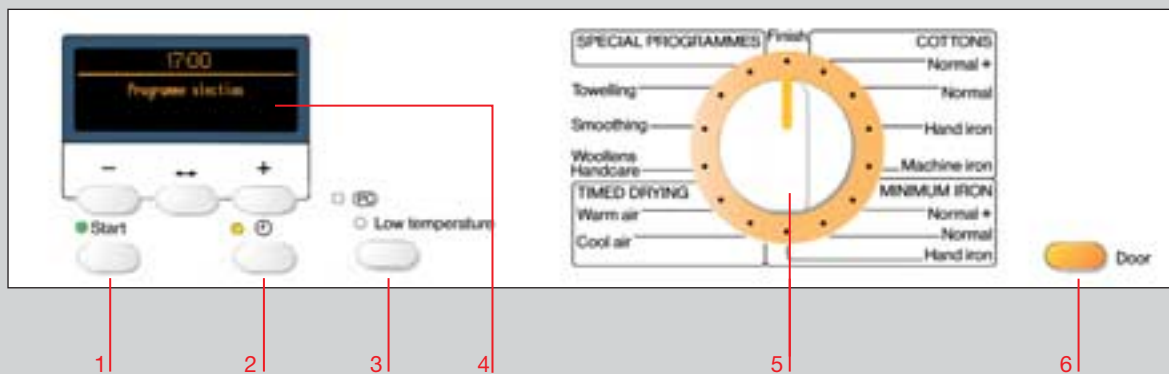

PT 5135 C/PT 5136

- 1 Start button
- 2 Delay start button
- 3 Low temperature button
- 4 User-friendly LCD graphic Display
- 5 Rotary selector switch
- 6 Door release button

MIELE'S NEW LITTLE GIANTS

PW 5065 and PW 6065 washer-extractors

Miele's compact washer-extractors with honeycomb drum are ideal for the small, professional in-house laundry – or the perfect additional machine for individual departments within a larger establishment.



PW 5065 in white



Washer-extractor PW 5065

- Load capacity: 6.5 kg
- Honeycomb drum, volume: 59 litres
- Spin speed: 1400 rpm
- g-Factor: 526, initial residual moisture 50%
- Available with stainless steel lid and white front and sides

Controls

- Novotronic L-Controls
- Door release button

Features

- 2 special heating elements
- Hot and cold water connections
- Drain pump (LP)
- Electric heating
- Drum lighting

Wash system

- Scoop and ladle technology for rapid saturation of laundry
- Gentle drum acceleration and imbalance monitoring for lower noise levels and better garment handling

Dispensing system

- Detergent drawer in front of machine
- Pre-equipped with connection points for external dispenser pump

Construction

- Stainless steel suds container and patented honeycomb drum
- All parts are coded for easy recycling at the end of their useful life
- Easy to install, can be sited free-standing or in a stack with matching tumble dryer

Optional extras

- Pump for liquid dispensing (kit required)
- Plinths
- Can be fitted with optional external payment system
- Optical interface for PC connection

PW 6065 PLUS



Washer-extractor PW 6065 and PW 6065 PLUS

- Load capacity: 6.5 kg
- Profitronic L (PW 6065)/Profitronic L PLUS (PW 6065 PLUS) controls
- Honeycomb drum, volume: 59 litres
- Spin speed: 1400 rpm
- Sluice and thermal disinfection programme
- g-Factor: 526, initial residual moisture 50%
- Available with stainless steel lid and white front and sides
- Dump valve (AV)
- Contacts for connection to 4 external liquid dispenser pumps
- Serial interface RS 232

All other features are the same as on the PW 5065

MIELE'S NEW LITTLE GIANTS

PT 5135 C and PT 5136 tumble dryers

Miele's compact dryers with honeycomb drum are the perfect combination for the Little Giant washer-extractors.

PT 5135 C in white



PT 5135 C

- Condenser drying system, condensate drained away via drain hose at rear of machine
- Load capacity: 6.5 kg
- Honeycomb drum, volume: 130 litres
- Available with stainless steel lid and white front and sides

Controls

- Novotronic L-Controls
- Electric heating
- Drum lighting

Drying system

- Sensitive drying system for precise monitoring of residual moisture levels

Construction

- Stainless steel patented honeycomb drum
- All parts are coded for easy recycling at the end of their useful life
- Easy to install, can be sited free-standing or in a stack with matching washer-extractor

Optional extras

- Plinths
- Can be fitted with optional external payment system
- Optical interface for PC connection

Tumble dryer PT 5136

- Vented drying system
- Load capacity: 6.5 kg
- Honeycomb drum, volume: 130 litres
- Large capacity filter
- Available with stainless steel lid and white front and sides

All other features are the same as on the PT 5135 C

The perfect finish with a small, compact rotary ironer

A rotary ironer creates the perfect finishing touch to the in-house laundry: they are easy to use, and provide a high standard of finish to a wide range of flatwork. The HM 16-83 featured here as a return feed model which require little space for installation and can be operated by one person.

HM 16-83



Output figures according to DIN 11 902

Depending on the initial residual moisture and the type of ironer, an output of up to 15 kg/h can be achieved.

Miele's rotary ironers create an absolutely perfect finish for your linen without the use of starch. The output levels achieved in practice are on average 20–40% lower than the maximum output level. The actual output depends on the skill and experience of the operator, the type of laundry being handled, how it is pre-sorted, the condition of the rotary ironer and the standard of finish required.

HM 16-83



HM 16-83:

Features

- Roller diameter 160 mm
- Roller length 830 mm
- Electric heating
 - Output up to 15 kg/h at 20% residual moisture

Controls

- Freely selectable temperatures
- Freely selectable roller speed

Construction

- Feed-in and return of laundry to the front
 - Can be installed against a wall
- Aluminium heater plate
- H x W x D: 960 x 1050 x 380 mm
- Polyester needle felt roller padding with ARAMID needle-felt cloth
- Foot operated control bar
- Chrome laundry rail

Safety features

- Patented finger guard
- Manual separation of heater plate from roller in event of a power cut
- Temperature limiter

Installation

- Simple installation with 13 A moulded plug

MIELE'S NEW LITTLE GIANTS

Washer-extractors PW 5065 and PW 6065



Model number	PW 5065	PW 6065	PW 6065 PLUS
Capacity (kg)	6.5	6.5	6.5
HONEYCOMB DRUM, volume (l)	59	59	59
Spin speed (max. rpm)	1400	1400	1400
G-factor	526	526	526
Residual moisture (%)	50	50	50
Controls/programmes			
NOVOTRONIC L-Controls	•	–	–
PROFITRONIC L-Controls	–	•	–
PROFITRONIC L PLUS-Controls	–	–	•
Plumbing			
Cold water, 1/2" with 3/4" threaded union	1x	1x	1x
Hot water, 1/2" with 3/4" threaded union	1x	1x	1x
Drain pump/dump valve	DN 22/-	-/DN 70	-/DN 70
Electrical connection			
	see chart below	see chart below	see chart below
Heating electric (EL)	EL	EL	
Detergent dispenser			
3 compartment dispenser in front of machine	•	•	•
Optional extras			
Dispenser for liquid agents (conversion kit required)	1	4	4
Serial interface RS 232	–	•	•
Dimensions, weight			
External dimensions H/W/D (mm)	850/595/700	850/595/700	850/595/700
Net weight (kg)	103	105	105
Stackable	•	•	
External finish			
Lid	Stainless steel	Stainless steel	Stainless steel
Front	White ¹	White ¹	White ¹
Sides	White ¹	White ¹	White ¹
Rear	White ¹	White ¹	White ¹
¹ Enamelled			

Versions available					
Mat No	Model No	Voltage	Amps	Drainage	Finish
6607170	PW 5065	2N AC 400 V 50 Hz	2 x 16	Drain pump	White
6607180	PW 5065	1N AC 230 V 50 Hz	1 x 25	Drain pump	White
6573640	PW 6065 Sluice	2N AC 400 V 50 Hz	2 x 16	Dump valve	White
6573660	PW 6065 Sluice	1N AC 230 V 50 Hz	1 x 25	Dump valve	White
6787870	PW 6065 Plus Sluice	2N AC 400 V 50 Hz	2 x 16	Dump valve	White
6787880	PW 6065 Plus Sluice	1N AC 230 V 50 Hz	1 x 25	Dump valve	White

Programme Chart PW 5065		
	Temperature in °C	Spin speed between
Standard programmes		
Cottons	30–95	0–1400
Minimum iron	30–60	0–1000
Delicates	cold to 40	0–600
Woollens	cold to 30	0–1200
Drain / Spin	–	0–1400
Towelling	40–60	0–1400
Table linen	60–75	0–1200
Bedding	40–60	0–1200
Curtains	cold to 40	0–400
Denim	cold to 40	0–900
Dark fabrics	cold to 40	0–1200
Special programmes		
Quick wash	40	0–1200
Shirts	40–60	0–600
Starch	–	0–1200
Pillows	40–95	0–1400
Outerwear	cold to 40	0–900
Proofing	30–40	0–800
Additional special programmes *		
Intensive wash	40–60	0–1400
Flour	40–95	0–1400
Grease and fat	40–95	0–1400
Towels short	40	0–1400
Towels	40–60	0–1400
Capes	30	0–600
Chem. Therm. Disinfection	60	0–1400
*Selectable only via the Settings / Supervisor level menu		

Programme Chart PW 6065 Sluice		
	Temperature in °C	Spin speed between
Sluice High		0–1400
Sluice Low		0–1400
Cottons Hygiene	95	0–1400
Cottons Universal	40–60	0–1400
Minimum iron	30–60	0–1000
Denim	40	0–900
Delicates	30	0–600
Woollens	30	0–1200
Drain	–	–
Spin	–	–
Special programmes*		
Kitchen linen	60	0–1400
Table linen	40	0–1200
Curtains	30	0–400
Pillows	60	0–1400
Outerwear	40	0–900
Proofing	30	0–800
* Selectable only via the Settings / Supervisor level menu		

Programme Chart PW 6065 PLUS Sluice		
	Temperature in °C	Spin speed between
Sluice High		0–1400
Sluice Low		0–1400
Cottons Hygiene	70–95	0–1400
Cottons Universal	cold to 60	0–1400
Minimum iron	30–60	0–1000
Delicates	30–60	0–600
Quick wash	cold to 40	0–1200
Woollens	cold to 40	0–1200
Silks	cold to 30	0–400
Shirts	cold to 60	0–600
Denim	cold to 40	0–900
Towelling	60–95	0–1400
Drain	–	–
Spin	–	–
Special programmes*		
Kitchen linen	60–95	0–1400
Table linen	30–60	0–1200
Curtains	cold to 40	0–400
Pillows	40–95	0–1400
Outerwear	cold to 40	0–900
Proofing	30–40	0–800
Thermal disinfection	85	0–1400
* Selectable only via the Settings / Supervisor level menu		

MIELE'S NEW LITTLE GIANTS

Tumble dryers PT 5135 C and PT 5136

Model number	PT 5135 C	PT 5136
Capacity (kg)	6.5	6.5
Drum, volume (l)	130	130
Condenser dryer	•	–
Vented dryer with air recycling system	–	•
Controls/programmes		
NOVOTRONIC L-Controls	•	•
Electrical connection		
	see chart below	see chart below
Heating options, Electric (EL), Gas (G)		
	EL	EL
Dimensions, weight		
External dimensions H/W/D (mm)	850/595/700	850/595/700
Net weight (kg)	60	58
Stackable	•	•
External finish		
Lid	Stainless steel	Stainless steel
Front	White ¹	White ¹
Sides	White ¹	White ¹
Rear		

¹ Enamelled

Versions available				
Mat No	Model No	Voltage	Amps	Finish
06567510	PT 5135 C	1N AC 230 V 50 Hz	1 x 13	White
06567520	PT 5136	3N AC 400 V 50 Hz	3 x 10	White
06567530	PT 5136	1N AC 230 V 50 Hz	1 x 25	White

Programme chart PT 5135 C, PT 5136		
	Settings	Low temperature option
Standard programmes		
Cottons	Normal +; Normal; Hand iron ♦; Machine iron	Yes
Minimum iron	Normal +; Normal; Hand iron ♦	Yes
Woollens handcare		No
Smoothing		No
Towelling	Normal +	No
Cool air	Timed drying	No
Warm air	Timed drying	Yes
Special programmes		
Denim	Normal; Hand iron ♦	No
Shirts	Normal; Hand iron ♦	No
Outerwear	Normal; Hand iron ♦	No
Proofing		No

Rotary ironer

Model number	HM 16-83
Roller diameter (mm)	160
Roller length (mm)	830
Aluminium heater plate	•
Cover: polyester-needle felt/Aramid needle felt cloth	•
Heating, electric (EL)	EL
Electrical connection	
AC 220–240 V 50–60 Hz	•
Heater rating [kW]	2.5–3.0
Total connected load [kW]	2.6–3.1
Fuse rating [A]	1x13
Output	
Roller speed (m/min)	2–4.5
Roller speed (rpm)	4–9
20% residual moisture (up to kg/h)	15
Laundry return feed	
To the front	•
Dimensions, weight	
External dimensions H/W/D (mm)	960/1050/380
Height when folded	–
Width when folded	–
Weight (kg)	38

Output figures according to DIN 11 902

The output levels achieved in practice are on average 20-40% lower than the maximum output level. The actual output depends on the skill and experience of the operator, the type of laundry being handled, how it is pre-sorted, the condition of the rotary ironer and the standard of finish required.

Miele Ireland Limited
Broomhill Business Complex
Broomhill Road
Tallaght
Dublin 24

Telephone: 01 461 0710
Telefax: 01 461 0797

Internet: www.miele.ie
E-mail: info@miele.ie

Miele worldwide:

AUSTRALIA

Miele Australia Pty. Ltd.
Box 381
Ferntree Gully,
Melbourne, VIC 3156
Tel. +61(0)3/97 64 71 00
Telefax +61(0)3/97 64 71 29

AUSTRIA

Miele Gesellschaft mbH.
Zentrale Salzburg
Mielestr. 1
5071 Wals/Salzburg
Tel. +43(0)6 62/85 84-4 26
Telefax +43(0)6 62/85 84-419

BELGIUM

N.V. Miele S.A.
1730 Mollem
Industriezone Asse 5, Nr. 22.1
Hof te Bollebeeklaan 9
Tel. +32(0)2/451.14.11
Telefax +32(0)2/451.14.14

CANADA

Miele Limited
55G East Beaver Creek Road
Vaughan, Ontario L4B 1E5
Tel. +1(0)9 05/7 07-11 71
Telefax +1(0)9 05/7 07-01 77

CZECH REPUBLIC

Miele spol. s.r.o.
61700 Brno, Hněvkovského 81B
Tel. +42(0)5/4 35 53-1 11
Telefax +42(0)5/4 35 53-1 19

DENMARK

Miele A/S
2600 Glostrup, Erhvervsvej 2
Tel. +45 43 27 11 00
Tel. Salg/Professional
+45 43 27 15 00
Tel. Jylland +45 97 12 70 66
Telefax hovednr. +45 43 27 11 09
Telefax Salg/Professional
+45 43 27 15 09

FINLAND

Miele Oy
01200 Vantaa, Porttikaari 6
Tel. +358(0)9/87 59 70
Telefax +358(0)9/87 59 72 99

FRANCE

Miele S.A.S.
93151-Le Blanc-Mesnil (Paris)
9 avenue Albert Einstein
Tel. +33(0)1/49 39 34 35
Telefax +33(0)1/49 39 44 38

GERMANY

Miele & Cie. KG
Carl-Miele-Straße 29
33332 Gütersloh
Tel.: 0 180 220 21 21 (6 ct/min)*
Fax: 0 180 111 20 30*
*Only in Germany
www.miele-professional.de
info@miele.de

GREECE

Miele Hellas GmbH
154 51 N. Psychiko-Athen
Mesogion 257
Tel. national 01/10 6 79 44 44
international 00 30/2/10 6 79 44 44
Telefax 01/10 6 79 42 09
international 00 30/2/10 6 79 42 09

HUNGARY

Miele Kft.
Hungária krt. 179 - 187
1146 Budapest
Tel. national 061/4 22-31 80
international 00361/4 22-31 80
Telefax +3(0)61/3 83 -93 04

HONG KONG

Miele Hong Kong Ltd.
AIA Plaza, Room 401, 4th Floor,
18 Hysan Avenue,
Causeway Bay, Hong Kong
Tel. +852/26101331
Fax +852/26101013

IRELAND

Miele Ireland Ltd., Dublin 24
Broomhill Road
Tallaght
Tel. +353(0)1/461 07 10
Telefax +353(0)1/461 07-97

ITALY

Miele Italia G. m. b. H.
39057 Eppan
Umfahrungsstraße 27
Tel. +39 04 71/66 61 11
Telefax +39 04 71/66 63 34

JAPAN

Miele Japan Corp.
150-0044 Tokyo, Shibuya-ku
Maruyamacho 3-6,
E Space Tower 11F
Tel.: +81-3-57 84-0036
Fax: +81-3-57 84-0037

KOREA

Miele Korea Limited
Miele Haus, 607-10 Yeoksam-dong
Gangnam-gu
SEOUL 135-080
Tel. +82 2 3451 9343
Telefax +82 2 3451 9399

LUXEMBOURG

Miele s.à r.l.
20, Rue Christophe Plantin
2339 Luxembourg
Tel. +352/4 97 11-25
Telefax +352/4 97 11-39

MEXICO

Miele S.A. de C.V.
Av. Santa Fé 170
German Centre 0-4-2
Col. Lomas de Santa Fé
01210, México, D.F.
Tel. +52/55/85 03 98 70 und
+52/55/85 03 98 73
Telefax +52/55/85 03 98 74

NETHERLANDS

Miele Nederland B.V.
4131 NR Vianen, De Limiet 2
Tel. +31(0)3 47/37 88 83
Telefax +31(0)3 47/37 84 29

NORWAY

Miele AS
Løxaveien 13
1351 Rud
Tel. +47/67 17 31 00
Telefax +47/67 17 31 10

POLAND

Miele Sp. z. o. o.
02-683 Warszawa
Ul. Gotarda 9
Tel. +48/22/5 48 40 00
Telefax +48/22/5 48 40 10

PORTUGAL

Miele Portuguesa, Lda.
Av. do Forte, 5
2795-504 Carnaxide
Tel. +351/21/42 48-100
Telefax +351/21/42 48-109

RUSSIA

000 Miele CIS
129164 Moskau
Zubarev per., 15-1
Tel. +7/095/745 89 90
Telefax +7/095/745 86 80

SINGAPORE

Miele Pte. Ltd.
163 Penang Road #04-02/03
Winsland House II
Singapore 238463
Tel. +65/67 35 11 91 oder
+65/65 62 88 95
Telefax +65/67 35 11 61

SLOVAKIA

Miele spol. s. r. o.
Plynárenská 1
82109 Bratislava
Tel. +421/2/53 63 37 37
Telefax +421/2/53 63 37 46

SLOVENIA

Werkkundendienststelle
Miele d.o.o.
Brodisce 15
1236 Trzin

SOUTH AFRICA

Miele SA (Pty) Ltd.
63 Peter Place
Bryanston 2194
PO Box 69434
Bryanston 2021
Tel. +27(0)11/5 48-19 00
Telefax +27(0)11/5 48-19 35

SPAIN

Miele S.A.
28108 Alcobendas (Madrid)
Carretera de Fuencarral, 20
Tel. +34/91/6 23 20 00
Telefax +34/91/6 62 02 66

SWEDEN

Miele AB
Industrivägen 20
171 27 Solna
Tel. +46(0)8/5 62 29-000
Telefax +46(0)8/5 62 29-209

SWITZERLAND

Miele AG
8957 Spreitenbach
Limmatstr. 4
Tel. +41(0)56/4 17 20 00
Telefax +41(0)56/4 17-24 69

TURKEY

Miele Elektrikli Aletler
Diş. Tic. ve Paz. Ltd. Şti.
Güvercin Sokak No. 10
80620 Levent-Istanbul
Tel. +90/2 12/3 25 84 40
Telefax +90/2 12/3 25 84 49

UKRAINE

TOV Miele
Podil Plaza
30 A, Spasskaya St.
04070 Kiev

USA

Miele, Inc.
9 Independence Way
Princeton, NJ 08540
Tel. 001-800/843 72 31
Telefax 001-609/419 42 41

UNITED ARAB EMIRATES

Miele Appliances Ltd.
Mankhool Road 1
Nashwan Building
P.O. Box 11 47 82, DUBAI
Tel. +971-4-39897-18
Telefax +971-4-39897-19

OTHER COUNTRIES:

Sales International
Miele & Cie. KG
Carl-Miele-Straße 29
33332 Gütersloh
Tel.: +49(0)52 41-89 15 07
Fax: +49(0)52 41-89 15 00

Please do not hesitate to contact us if you require further information on these machines, or on any of our other products.

The images, logos, names and trading marks used in this brochure to identify Miele, our products and services are our proprietary marks whether registered or unregistered. These may only be used with the express permission of Miele.